

Delphion

RESEARCH | INTEGRATED IAM | SERVICES | INSIDE DEL

The Delphi n Integrated View

Buy Now: PDF | More choices... Tools: Add to Work File: Create new

View: Expand Details | INPADOC | Jump to: Top Go to: Derwent... ☒

Title: WO9304607A1: DEPILATORY DEVICE
Country: WO World Intellectual Property Organization (WIPO)
Kind: A1 Publ. of the Int. Appl. with int. search report
Inventor: CLEYET, Aimé;
GABION, Georges;
ROGER, Robert;
Assignee: BRAUN AKTIENGESSELLSCHAFT
CLEYET, Aimé
GABION, Georges
ROGER, Robert
News, Profiles, Stocks and More about this company

Published / Filed: March 18, 1993 / Aug. 20, 1992
Application Number: WO1992EP0001910
IPC Code: A45D 28/00
Priority Number: Aug. 28, 1991 ER199100001069Z

Abstract:

Described is a depilatory device for removing hair from the human body, the device having a housing which can be held in the user's hand, a motor-driven rotating cylinder fitted with pincer elements, and at least one actuator element which passes through the rotating cylinder and is designed to actuate the pincer elements coupled to it. The actuator element is driven via a cam disc by a rotatably mounted pressure-exerting element associated with it, and is displaced against the pressure of a spring, the cam disc being designed as a control element with a control cam which makes contact with the pressure-exerting element.
[Show in French]

INPADOC Show legal status actions

Legal Status: AT BE CH DE DK ES FR GB GR IE IT JP KR LU MC NL SE US

Country:

Family: Show 5 known family members

Description: Expand full description

+

First Claim:

Show all claims
1. Epilationsgerät zum Entfernen von Haaren am menschlichen Körper mit einem Gehäuse (1), das vom Benutzer in der Hand gehalten werden kann, mit einem von einem Motor (3) angetriebenen, Klemmelemente (5, 6) aufweisenden Drehzylinder (7) und mit wenigstens einem den Drehzylinder (7) durchsetzenden Betätigungselement (9, 10) zur Betätigung der mittels dem

gekoppelten Klemmelemente (5, 6), wobei das Betätigungselement (9, 10) von einem diesem zugeordneten, drehbar gelagerten Druckelement (47) über eine Scheibe betätigbar gegen den Druck einer Feder verschiebbar ist, dadurch gekennzeichnet, daß die Scheibe als Steuerelement (45) mit einer am Druckelement (47) anliegenden Steuerkurve (46) ausgebildet ist,

Other Abstract None

Info:



this for the Gallery...

© 1997-2002 Delphion, Inc. Research Subscriptions | Privacy Policy | Terms & Conditions | Site Map | Cont

- pivot action
- Cam is @ end of shaft
- no shaft cam.
- no other eng but equivalent prod.

FIG.1

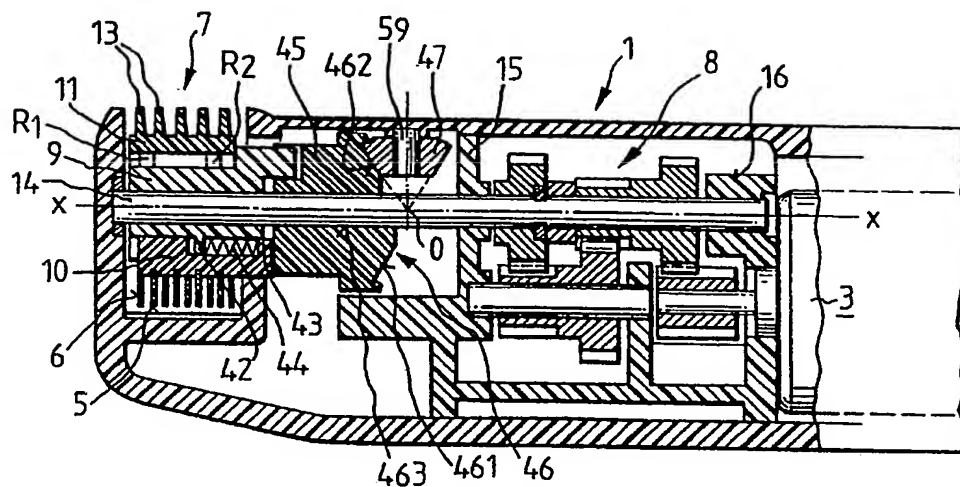


FIG.1a

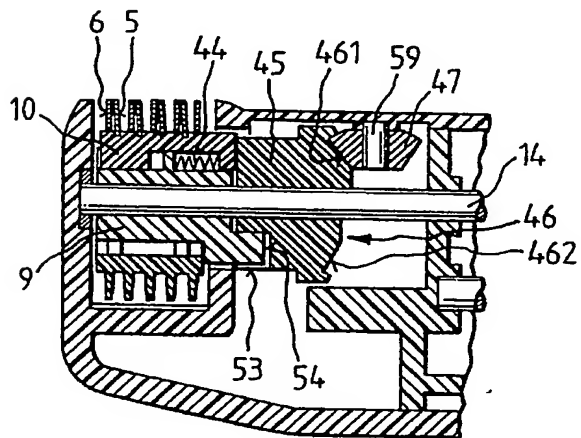


FIG.2

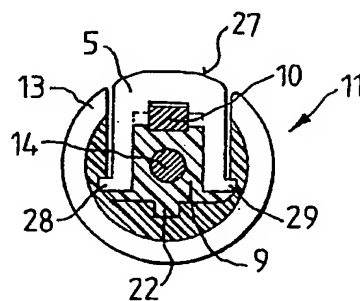


FIG.3

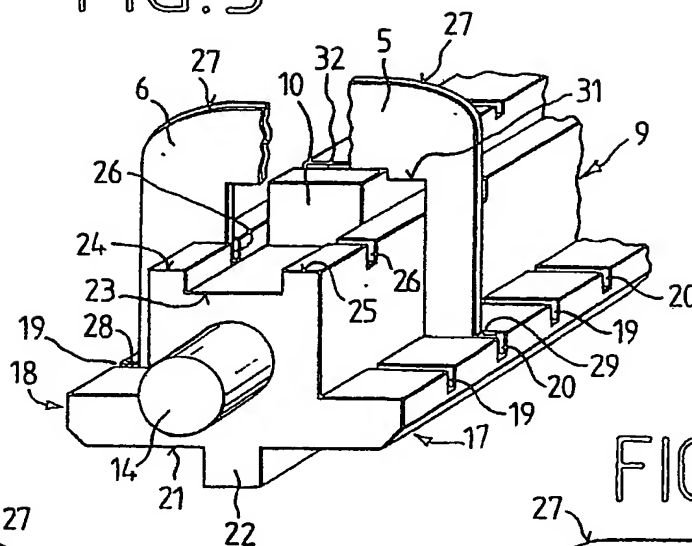


FIG.3a

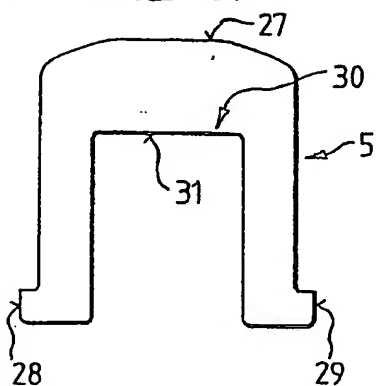


FIG.3b

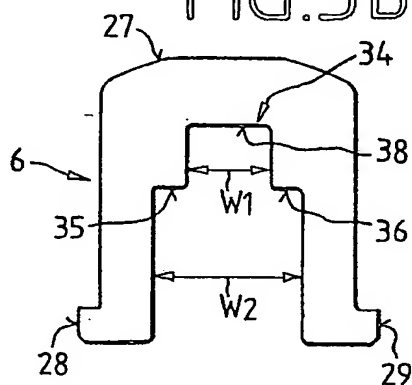


FIG.3c

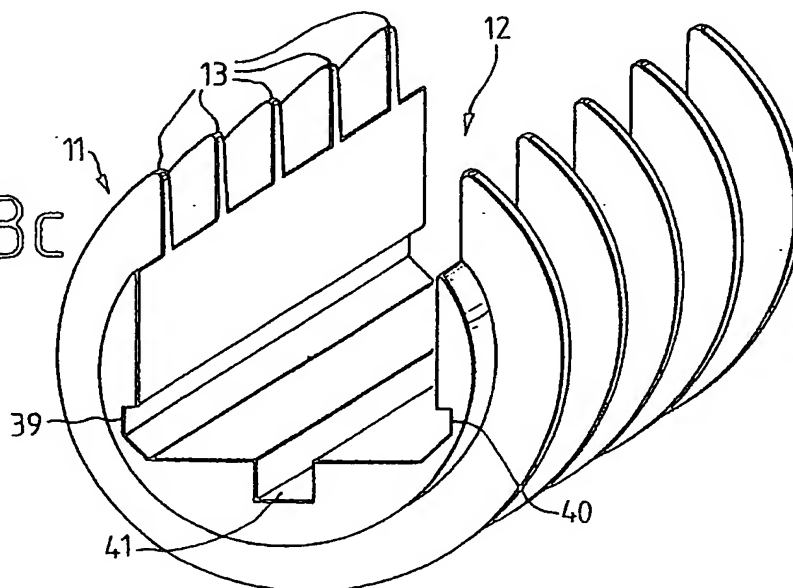


FIG. 5

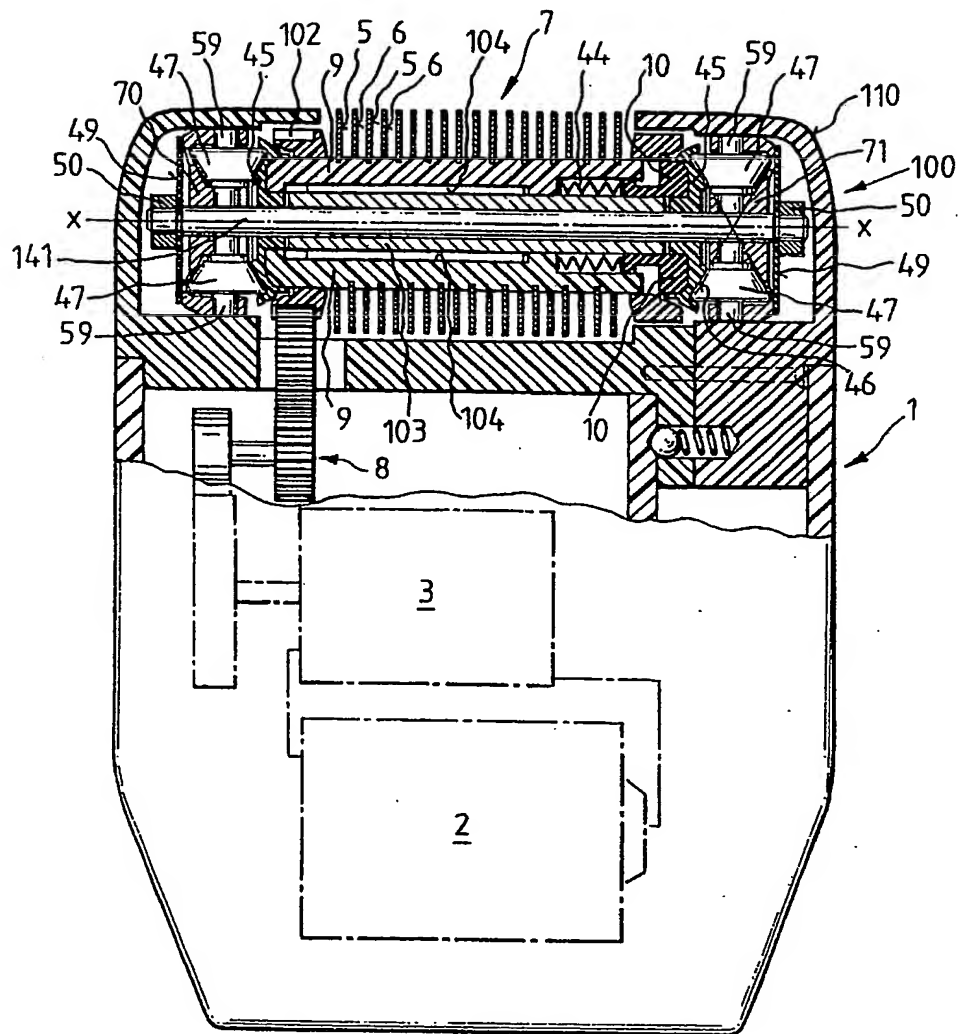


FIG.5a

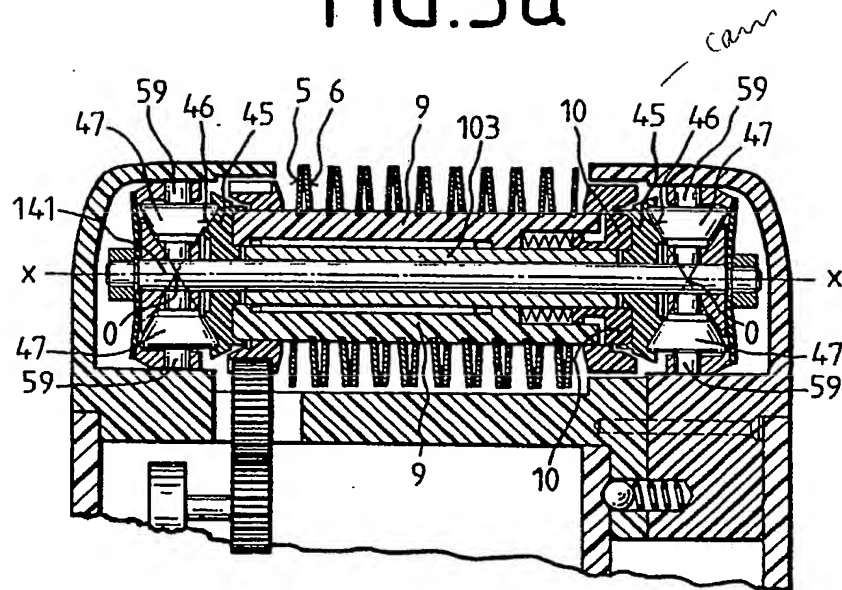


FIG.4

